




Couplable multipoint lockings (CB, CH, C)

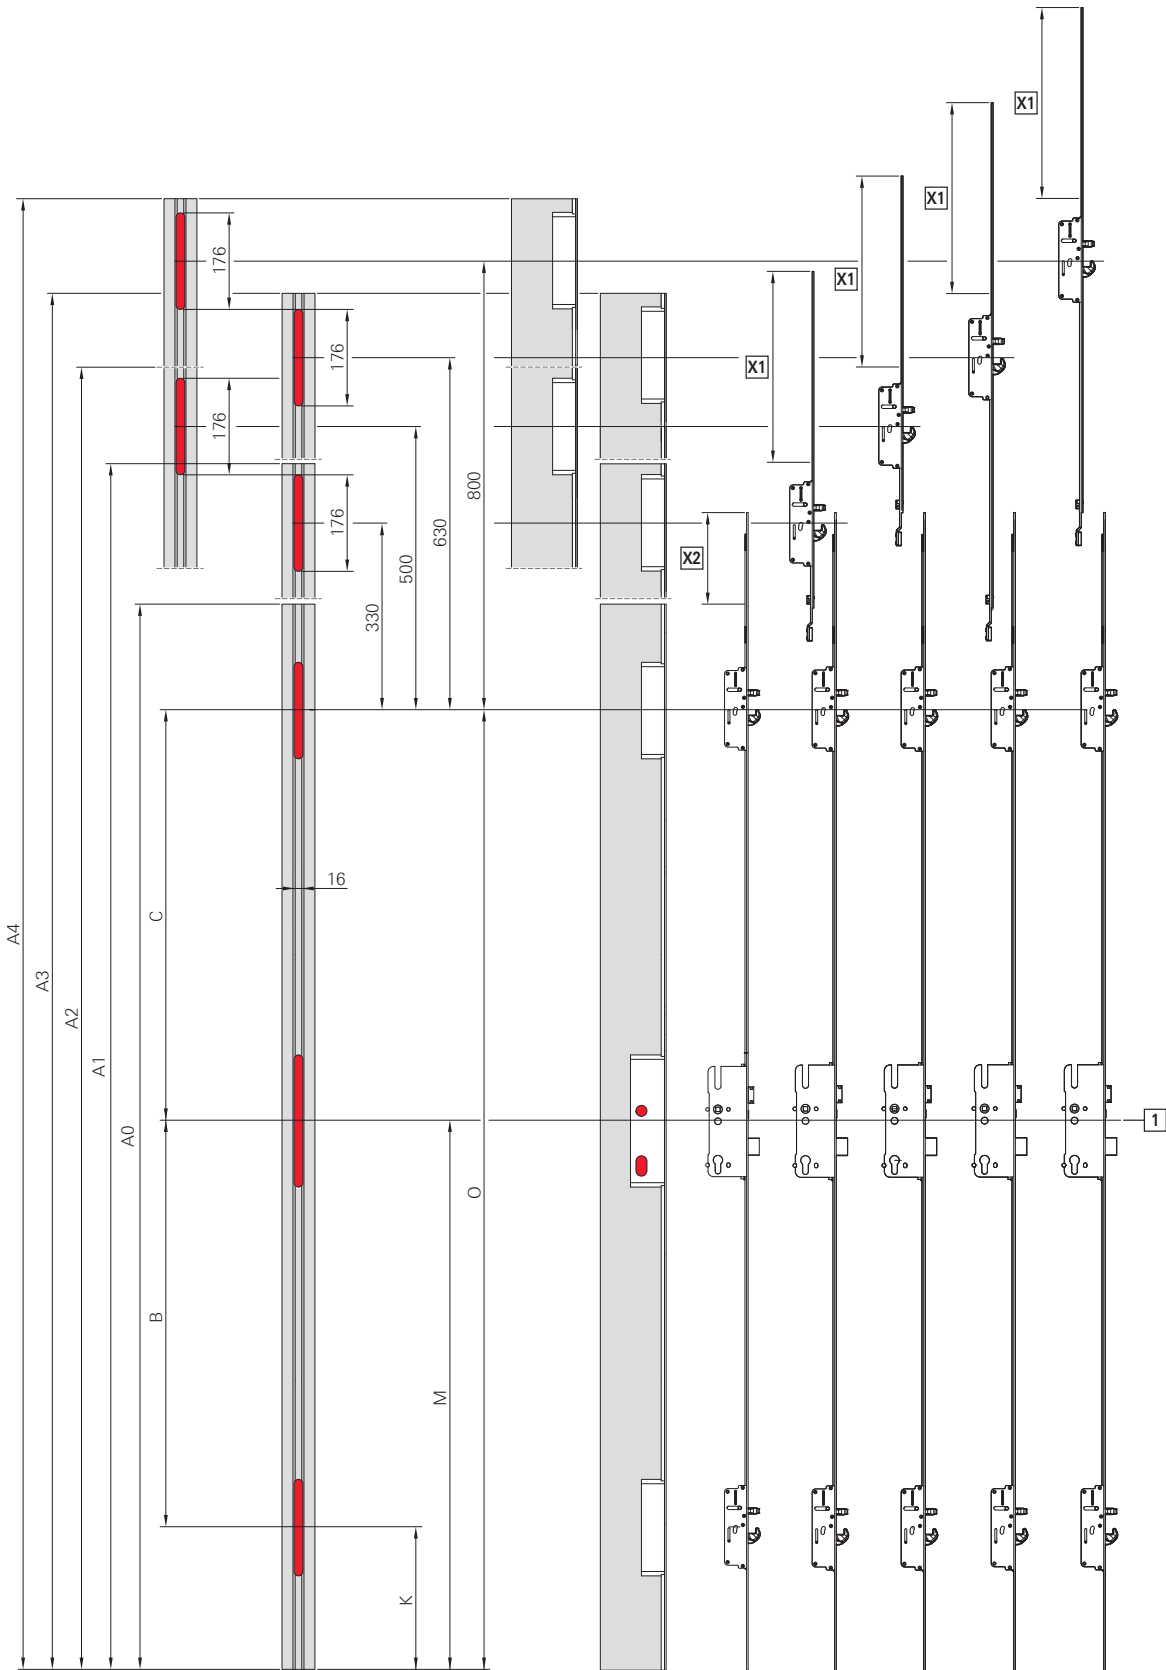

[1] Faceplate marking

Installation

Drilling and routing dimensions

Sash

Pattern	A0	A1	A2	A3	A4	B	C	K	M	O	[X1]	[X2]
V02/03	1900 – 2200	2400 – 2530	2530 – 2700	2700 – 2830	2830 – 3000	738	752	260	998	1750	Max. 200 depending on the sash height	170