




## SmartKing™ 1 door mini controller

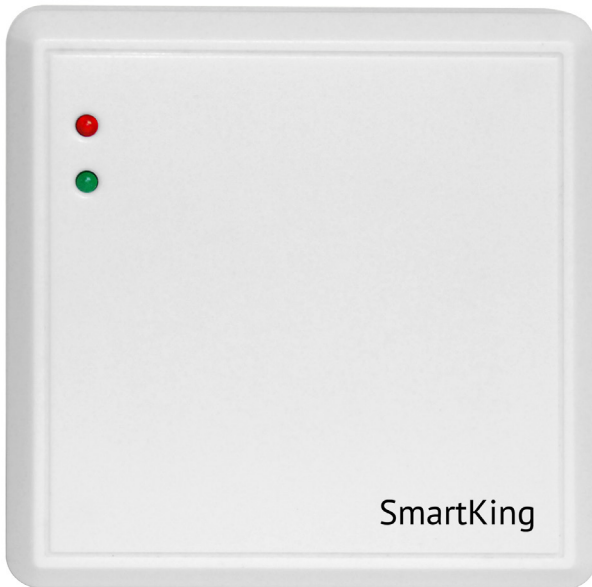

### CHARACTERISTICS

- Compact, economical and practical, secure and reliable 1 door mini controller
- Programming via provided infrared remote control
- Programming via external keypad reader (if available)
- Attempt to tamper the external reader (magnetism, short circuit or other illegal ways) will not unlock the door
- Capacity of 1000 users
- Easy and fast (< 8 sec) copying of user information from one controller to another
- Every user can change the password without master code if the external reader is the main keypad reader
- Password is 4-6 digits long
- Programmable lock output: timed or toggle
- Easy wiring and universal to various electric locks

### TECHNICAL SPECIFICATIONS

- Dimensions: 86 x 86 x 20 mm
- Power supply: 12 – 14 VDC
- Stand-by current: < 11 mA
- Output: Standard 26 bit wiegand or virtual card number
- Operating temperature: -40°C + 60°C
- Operating humidity: 0 – 95%

### ORDER INFORMATION

- PA240510 – SmartKing 1 door mini controller