



SmartKing™ matted waterproof standalone access controller EM & HID




CHARACTERISTICS

- Compact and stylish matted design
- Capacity: 10,000 users
- Long lifespan
- Very low power consumption
- Can work standalone or as a wiegand reader
- EM & HID
- Anti-Magnetic prevention access
- Card manager can add or delete users via manager card
- Built-in optical tamper alarm technology
- Waterproof, fully potted, confirms to IP65
- Keypad lockout and anti-passback function , door open detection
- Non-volatile memory , dual Led display red green

TECHNICAL SPECIFICATIONS

- Dimensions: 103 x 48 x 23 mm (L x W x H)
- Lock output: 3A
- Power supply: 12V dc +/- 10%
- Card type: 125 Khz EM & HID
- Stand-by current consumption: < 30 mA
- Response time: 0,1 second
- Card reading range: 3-6 cm
- Alarm output: 3A
- User capacity: 10.000
- Anti-pass-back: yes
- Protection: waterproof , IP65 , optical tamper, anti-magneti anti-static interference 15 KV
- Communication interface: Wiegand 26 bit
- Operating temperature: -40°C ~ +60°C
- Operating humidity: 0 – 95 %
- Cable length: 90 – 100 cm

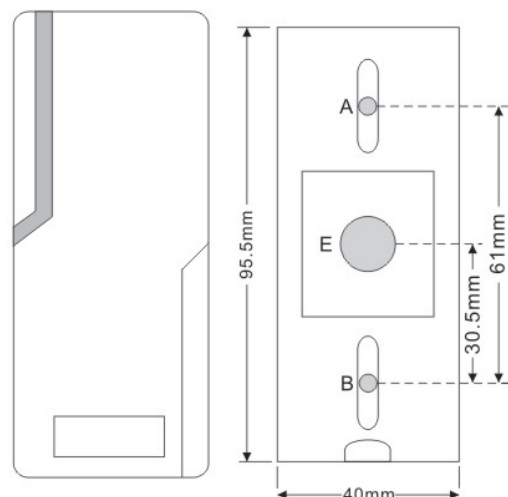

ORDER INFORMATION

- PA240103 - SmartKing™ matted waterproof standalone access controller EM & HID