




SmartKing™ power supply 12V/3A with box



CHARACTERISTICS

- Power supply developed for access control applications
- Fail safe and fail secure output with adjustable delay 0-10sec
- Separate input to connect an exit button with status led
- UL tested and approved
- Built-in battery charger for 12V/7AH battery
- Automatic power changeover
- Built-in short-circuit, over-voltage protection circuit
- Easy and fast diagnostic with 3 led indications on the front: power, DC 12V, charge
- Mounting holes for optional tamper protection
- Space available for extra components

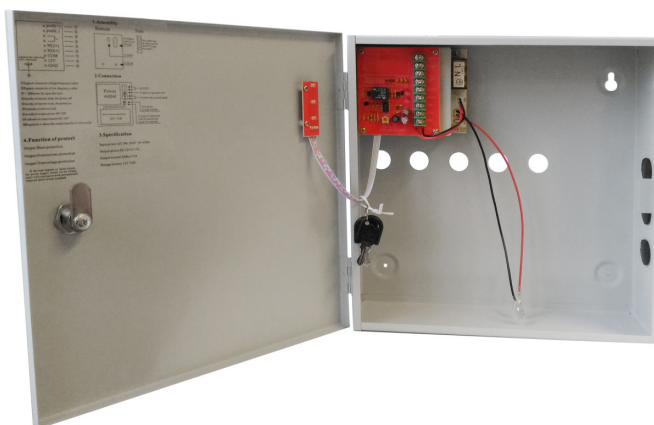

DESCRIPTION

- Compact and fully featured universal power supply, compatible with fail-safe and/or fail-secure locking devices. The built-in features guarantee a safe and worry free operation of all the connected devices.

TECHNICAL SPECIFICATIONS

- Dimensions: 285 x 285 x 90 mm
- AC input: 220Vac +-5% / 50Hz or 110 Vac +-5% / 60Hz
- DC output: regulated output of 12Vdc, max. 3A
- Input: normally open for exit button
- Delay lock output: adjustable 0-10sec

ORDER INFORMATION

- PS213801 - SmartKing™ power supply 12V/3A with box